

EUROPEAN TECHNICAL ASSESSMENT

ETA 16/0661
Version 01
Date of issue: 2017-03-16



UBAtc Assessment Operator:
Belgian Construction Certification Association
Rue d'Arlon 53 - 1040 Brussels
www.bcca.be - info@bcca.be



Technical Assessment Body issuing the European Technical Assessment: UBAtc.
UBAtc has been designated according to Article 29 of Regulation (EU) No 305/2011
and is member of EOTA (European Organisation for Technical Assessment)

Trade name of the construction product:

MG2-A XL

Product family to which the construction product belongs:

35 - Fire Protective collar

Manufacturer:

Rf-technologies
Lange Ambachtstraat 40
9860 Oosterzele
Belgium

Manufacturing plant(s):

CESAM (Slovakia)

Website:

www.rft.be

This European Technical Assessment is issued in accordance with Regulation (EU) No 305/2011, on the basis of:

Guideline for European technical approval (ETAG), used as European Assessment Document (EAD): 026-2

This European Technical Assessment contains:

12 pages, including 2 annexes which form an integral part of the document.



**European Organisation
for Technical Assessment**

Legal bases and general conditions

- 1 This European Technical Assessment is issued by UBAtc (Union belge pour l'Agrément technique de la construction, i.e. Belgian Union for technical Approval in construction), in accordance with:
 - Regulation (EU) No 305/2011¹ of the European Parliament and of the Council of 9 March 2011 laying down harmonised conditions for the marketing of construction products and repealing Council Directive 89/106/EEC
 - Commission Implementing Regulation (EU) No 1062/2013² of 30 October 2013 on the format of the European Technical Assessment for construction products
 - European Assessment Document (EAD) :
 - Guideline for European technical approval (ETAG), used as European Assessment Document (EAD): ETAG 026-2
- 2 Under the provisions of Regulation (EU) No 305/2011, UBAtc is not authorized to check whether the provisions of this European Technical Assessment are met once the ETA has been issued.
- 3 The responsibility for the conformity of the performances of the products with this European Technical Assessment and the suitability of the products for the intended use remains with the holder of the European Technical Assessment.
- 4 Depending on the applicable Assessment and verification of constancy of performance (AVCP) system, (a) notified body(ies) may carry out third-party tasks in the process of assessment and verification of constancy of performance under this Regulation once the European Technical Assessment has been issued.
- 5 This European Technical Assessment allows the manufacturer of the construction product covered by this ETA to draw up a declaration of performance for the construction product.
- 6 CE marking should be affixed to all construction products for which the manufacturer has drawn up a declaration of performance.
- 7 This European Technical Assessment is not to be transferred to other manufacturers, agents of manufacturers, or manufacturing plants other than those indicated on page 1 of this European Technical Assessment.
- 8 The European Technical Assessment holder confirms to guarantee that the product(-s) to which this assessment relates, is/are produced and marketed in accordance with and comply with all applicable legal and regulatory provisions, including, without limitation, national and European legislation on the safety of products and services. The ETA-holder shall notify the UBAtc immediately in writing of any circumstance affecting the aforementioned guarantee. This assessment is issued under the condition that the aforementioned guarantee by the ETA-holder will be continuously observed.
- 9 According to Article 11(6) of Regulation (EU) No 305/2011, when making a construction product available on the market, the manufacturer shall ensure that the product is accompanied by instructions and safety information in a language determined by the Member State concerned which can be easily understood by users. These instructions and safety information should fully correspond with the technical information about the product and its intended use which the manufacturer has submitted to the responsible Technical Assessment Body for the issuing of the European Technical Assessment.
- 10 Pursuant to Article 11(3) of Regulation (EU) No 305/2011, manufacturers shall adequately take into account changes in the product-type and in the applicable harmonised technical specifications. Therefore, when the contents of the issued European Technical Assessment do not any longer correspond to the product-type, the manufacturer should refrain from using this European Technical Assessment as the basis for their declaration of performance.
- 11 All rights of exploitation in any form and by any means of this European Technical Assessment is reserved for UBAtc and the ETA-holder, subject to the provisions of the applicable UBAtc regulations.
- 12 Reproduction of this European Technical Assessment including transmission by electronic means shall be in full. However, partial reproduction can be made with the written consent of UBAtc. In this case partial reproduction has to be designated as such. Texts and drawings of advertising brochures shall not contradict or misuse the European Technical Assessment.
- 13 Subject to the application introduced, this European Technical Assessment is issued in English and may be issued by the UBAtc in its official languages. The translations correspond fully to the English reference version circulated in EOTA.
- 14 This European Technical Assessment was first issued by UBAtc on 16 March 2017.

®

¹ OJEU, L 88 of 2011/04/04

² OJEU, L 289 of 2013/10/31

Technical Provisions

1 Technical description of the product

1.1 General

MG2-A XL is a fire stopping and fire sealing penetration seal in the form of a fire stopping collar.

The MG2-A XL fire stopping pipe closure device is intended for uses in environmental conditions type Y2 according to ETAG 026-2 i.e. for uses in conditions exposed to weathering and all other exposures indoor and outdoor, but not exposed to rain nor UV.

The MG2-A XL fire resistant pipe closure device is affixed around plastic pipes (PE and PVC) to prevent propagation of fire. It expands through heat thus closing off the openings and making them fire resistant and thereby prevents the spread of smoke and fire.

It is composed of a stainless steel casing of 100 mm or 150 mm width and a reactive inlay (Rf-Expand 147, layers of 6 mm) of 24 mm or 30 mm thickness depending on the diameter of the collar (see Figure 1 and Table 1).

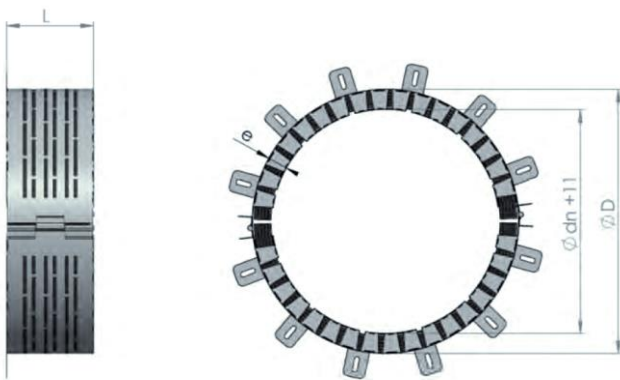


Figure 1 : MG2-A XL

The assumed working life of the MG2-A XL fire stopping pipe closure device is minimum 25 years, provided that the fire stopping pipe closure device is subject to appropriate use and maintenance, in accordance with the manufacturer recommendations.

MG2-A XL fire stopping pipe closure devices are manufactured at the Rf-technologies' production plant in CESAM (Slovakia)

1.2 Dimensions

MG2-A XL is available in diameters between 200 mm and 400 mm as shown in Table 1.

Table 1 : Dimensions of MG2-A XL (mm)

Dn	200	250	315	355	400
D	271	321	396	436	481
L	100		150		
e	24		30		

Installation of MG2-A XL: see clause 2.3

2 Specification of the intended use(s) in accordance with the applicable EAD (ETAG026-2)

2.1 Intended uses

MG2-A XL is a penetration seal for services penetrating walls and floors. MG2-A XL is designed for mounting on the surface of walls and floors around large-format plastic (PVC and PE) pipes to seal pipe penetrations with diameters between 200 mm and 400 mm against the spread of smoke and fire.

The through-elements are installed in drilled holes made through aerated concrete floors, 150 mm thick with a bulk density of (650 ± 200) kg/m³ or through aerated concrete walls, 100 mm thick, with a bulk density of (650 ± 200) kg/m³. A detailed description of these construction elements are given in Annex 1 of this ETA.

This ETA covers assemblies installed in accordance with the provisions given in Annex 1. Other intended uses may be supported by other means at national level but are not covered by this ETA.

2.2 Use Categories

The MG2-A XL fire stopping pipe closure device is intended for uses in environmental conditions type Y2 according to ETAG 026-2 i.e. for uses at conditions exposed to weathering and all other exposures indoor and outdoor but not exposed to rain nor UV.

The provisions made in this European Technical Assessment are based on an assumed intended working life of 25 years.

Indications given regarding the working life cannot be interpreted as a guarantee given by the producer or the UBAtc, but are to be regarded only as a means for choosing the appropriate product(s) in relation to the expected economically reasonable working life of the construction works.

2.3 Assumptions under which the product was favourably assessed

2.3.1 Manufacturing directives

This European Technical Assessment is being issued for MG2-A XL fire stopping pipe closure device on the basis of agreed data/information, deposited with the UBAtc, which characterises the product that has been assessed. Changes to the product/production process, which could result in the deposited data/information being incorrect, should be notified to the UBAtc before the changes are introduced. The UBAtc will decide whether or not such changes affect the ETA and consequently the validity of the CE marking on the basis of the ETA and if so whether further assessment/alterations to the ETA, shall be necessary.

2.3.2 Installation

2.3.2.1 General information for creating a pipe penetration

The area to be sealed requires the same fire resistance as the complete wall construction. In order to ensure that the stability of the services is maintained under fire conditions, all services should be adequately supported at maximum 400 mm and from the non-exposed surface of the floor or at 200 mm to 400 mm either side of the supporting structures for walls. More precise instructions for the installation of MG2-A XL fire stopping pipe closure device can be found in Annex 1 of this ETA and the technical instructions of the manufacturer.

Products may only be applied by trained professionals with adequate knowledge of and experience in the use of fire stopping products.

2.3.2.2 General information about MG2-A XL

- MG2-A XL collar is suitable for surface mounted conditions;
- MG2-A XL shall be installed at both sides of the wall or at the bottom side of a floor;
- MG2-A XL is suitable for all types of PVC-U and PEHD pipes;
- The MG2-A XL should be fixed to a wall or floor with a fire resistance at least equal to that of the fire stopping pipe closure device;
- The MG2-A XL collar is suitable for pipe diameters of 200 mm to 400 mm according to the field of application, given in this ETA;

2.3.2.3 Conditions for the application

The product is classified as type Y2.

2.4 Recommendations

2.4.1 Recommendations on packaging, transport and storage

MG2-A XL should be stored in dry conditions.

2.4.2 Recommendations on use, maintenance and repair

The addition of new services is permissible if distances between the pipes are respected.

Any default of the collar should be immediately repaired by replacement.

2.4.3 Regarding safety instructions:

MG2-A XL should be handled and fixed with protective gloves to avoid hand damage by the steel housing

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability

Not relevant.

3.2 Safety in case of Fire

3.2.1 Reaction to fire

The MG2-A XL fire stopping pipe closure device has a reaction to fire classification class E according to EN 13501-1.

3.2.2 Fire resistance

The fire resistance classification of the MG2-A XL fire stopping pipe closure device according to EN 13501-2 and according to the field of direct application of test results described in EN 1366-3:2009 is given in Annex 1. The mentioned fire resistance classes however can never be higher than the fire resistance class of the penetrated structure.

This ETA includes:

- PVC pipes penetrating aerated concrete floors, lightweight partitions, aerated concrete walls, mineral wool panels, see annex 1.1;
- PE pipes penetrating aerated concrete floors, lightweight partitions, aerated concrete walls, mineral wool panels, see annex, see annex 1.2.

Hygiene, Health and the environment

3.2.3 Air permeability

No performance assessed.

3.2.4 Water permeability

No performance assessed.

3.2.5 Release of dangerous substances

The holder of the assessment has submitted a written declaration stating that the MG2-A XL fire stopping pipe closure device contains no dangerous substances according to the EC-database, known at the date of issuing.

In addition to the specific clauses relating to dangerous substances contained in this European Technical Assessment, there may be other requirements applicable to the products falling within its scope (e.g. transposed European legislation and national laws, regulations and administrative provisions). In order to meet the provisions of the EU Construction Products Directive, these requirements need also to be complied with, when and where they apply.

3.3 Safety in Use

3.3.1 Mechanical resistance and stability

No performance assessed.

3.3.2 Resistance to impact / movement

No performance assessed.

3.3.3 Adhesion

No performance assessed.

3.4 Protection against noise

3.4.1 Airborne sound insulation

No performance assessed.

3.5 Energy economy and heat retention

3.5.1 Thermal resistance

No performance assessed.

3.5.2 Water vapour permeability

No performance assessed.

3.6 Aspects of durability and serviceability

The MG2-A XL fire stopping pipe closure device fulfils the environmental conditions type Y₂ requirements.

3.7 Characterisation of the product

3.7.1 General

A general description of MG2-A XL fire stopping pipe closure device is given in clause 1.1 of the ETA. The formulation of the inlay of MG2-A XL fire stopping pipe closure device has been disclosed to the approval operator BCCA.

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with Regulation (EU) N° 305/2011, Article 65, Directive 89/106/EEC is repealed, but references to the repealed Directive shall be construed as references to the Regulation.

The system of assessment and verification of constancy of performance, specified in the Decision of the Commission 1999/454/EC³, as amended, is specified in Table 2.

Table 2– System of assessment and verification of constancy of performance applicable to MG2-A XL

Product(s)	Intended use(s)	Level(s) or class(es)	Assessment and verification of constancy of performance system(s)*
Fire Stopping and Fire Sealing Products	For fire compartmentation and/or fire protection or fire performance	Any	1

* See Annex V to Regulation (EU) N° 305/2011

In addition, according to the decision 1999/454/EC of the European Commission, as amended, and Commission Delegated Regulation (EU) 2016/364⁴, the systems of assessment and verification of constancy of performance specified in Table 3 apply to fire stopping and fire sealing products with regard to reaction to fire.

Table 3– Systems of assessment and verification of constancy of performance with respect to the reaction to fire

Product(s)	Intended use(s)	Level(s) or class(es) (reaction to fire)	Assessment and verification of constancy of performance system(s) ^a
Fire Stopping and Fire Sealing Products	For uses subject to regulations on reaction to fire	(A1, A2, B, C) ^b	1
		(A1, A2, B, C) ^c , D, E, F	3
		(A1 to F) ^d , NPD ^e	4

^a Systems 1, 3 and 4 : See Regulation (EU) N° 305/2011, Annex V
^b Products/materials for which a clearly identifiable stage in the production process results in an improvement of the reaction to fire classification (e.g. an addition of fire retardants or a limiting of organic material)
^c Products/materials not covered by footnote (b)
^d Products/materials that do not require to be tested for reaction to fire (e.g. products/materials of class A1 according to Commission Decision 96/603/EC⁵, as amended)
^e 'No Performance Declared' in accordance with Regulation (EU) N° 305/2011, Article 6(f)

³ see OJEU L178/52 of 1999/07/14

⁴ see OJEU L68/4 of 2016/03/15

⁵ see OJEU L267 of 1996/10/19

5 Technical details necessary for the implementation of the AVCP system, as foreseen in the applicable EAD

5.1 Tasks for the ETA-holder

5.1.1 General

The manufacturer exercises permanent internal control of production. All the elements, requirements and provisions adopted by the manufacturer are documented in a systematic manner in the form of written policies and procedures, including records of results performed in accordance with the test plan. This production control system ensures that the product is in conformity with this ETA.

5.1.2 Personnel and equipment

The personnel involved in the production process is identified, sufficiently qualified and trained to operate and maintain the production equipment. Machinery and equipment are regularly maintained and this is documented. All processes and procedures of production are recorded at regular intervals.

5.1.3 Traceability of processes

The manufacturer maintains a traceable documentation of the production process from purchasing or delivery of raw or basic raw materials up to the storage and delivery of finished products.

5.1.4 Non-conforming products

Products that do not comply with requirements as specified in this ETA are separated from the conforming products and marked as such. The manufacturer registers non-compliant production and action(s) taken to prevent further non-conformities. External complaints are also documented, as well as actions taken.

5.1.5 Control of monitoring and measuring devices

Where necessary, measuring equipment is:

- Calibrated or verified at specific intervals, or prior to use, against measurement standards traceable to international or national measurement standards; where no standards exists the basis used for calibration is recorded;
- Adjusted or re-adjusted as necessary;
- Identified to enable calibration to be determined.

When the equipment is found not to conform to requirements the validity of previous measuring results are assessed and recorded. Appropriate actions are taken on the equipment and any product affected.

5.1.6 Control plan for the manufacturer

The manufacturer exercises permanent internal control of production according to the prescribed plan.

5.2 Tasks of notified bodies

5.2.1 For fire compartmentation and/or fire protection or fire performance uses

Initial type testing

For the initial type testing of the product (see Annex V of Regulation (EU) N° 305/2011) the tasks for the approved body are limited to the following characteristics, where relevant:

- Resistance to fire;
- Mechanical resistance and stability;
- Adhesion;
- Resistance to impact/movement;
- Release of dangerous substances.

Assessment tests are conducted by the assessment body or under its responsibility (which may include a proportion conducted by an indicated laboratory or by the manufacturer, witnessed by the assessment body) in accordance with section 2.4 of ETAG 026-2, unless the ETA-holder has opted to make use of the possibility not to have the product's performance assessed. The assessment body assessed the results of these tests in accordance with section 2.4 of ETAG 026-2, as part of the ETA issuing procedure.

Initial inspection of the factory and of the factory production control and continuing surveillance, judgment and assessment of factory production control

For the initial inspection of the factory and of the factory production control (see Annex V of Regulation (EU) N° 305/2011), and for the continuing surveillance, judgement and assessment of the factory production control (see Annex V of Regulation (EU) N° 305/2011), parameters related to the following characteristics are of interest to the approved body, where relevant:

- Resistance to fire;
- Mechanical resistance and stability;
- Adhesion;
- Resistance to impact/movement.

Surveillance inspections are conducted at least twice per year.

5.2.2 For uses subject to reaction to fire regulations

Initial type testing

For fire stopping and fire sealing products under systems 1 and 3, regarding the initial type testing of the product (see Annex V of Regulation (EU) N° 305/2011), the task of the approved laboratory is limited to the assessment of the reaction to fire class, as indicated in the Commission Decision 94/611/EC.

Initial inspection of the factory and of the factory production control and continuing surveillance, judgment and assessment of factory production control

For fire stopping and fire sealing products under system 1, for the initial inspection of the factory and of the factory production control (see Annex V of Regulation (EU) N° 305/2011), and for the continuing surveillance, judgement and assessment of the factory production control (see Annex V of Regulation (EU) N° 305/2011), parameters related to the reaction to fire class, as indicated in the Commission Decision 94/611/EC are of interest of the notified body.

Surveillance inspections are conducted at least twice per year.

UBAtc asbl is a non-profit organization according to Belgian law. It is a Technical Assessment Body notified by the Belgian notifying authority, the Federal Public Services Economy, SMEs, Self-Employed and Energy, on 17 July 2013 in the framework of Regulation (EU) No 305/2011 of the European Parliament and of the Council of 9 March 2011 laying down harmonised conditions for the marketing of construction products and repealing Council Directive 89/106/EEC and is member of the European Organisation for Technical Assessment, EOTA (www.eota.eu).


This European Technical Assessment has been issued by UBAtc asbl on the basis of the technical work carried out by the Assessment Operator, BCCA.

On behalf of UBAtc asbl,



Peter Wouters,
director

On behalf of the Assessment Operator, BCCA,
responsible for the technical content of the ETA,



Benny De Blaere,
director general

The most recent version of this European Technical Assessment may be consulted on the UBAtc website (www.ubatc.be).

Annexes

ANNEX 1.1: MG2-A XL fire stopping pipe closure device used with PVC-pipes

This annex reports fire resistance of MG2-A XL fire stopping pipe closure device used with PVC pipes penetrating aerated concrete floors and aerated concrete panels. The test results obtained on tubes in PVC according to EN 1239-1, EN 1431-1 or EN 1452-1 apply to tubes in PVC-U according to EN 13291-1, EN 1431-1 and EN 1452-1 and tubes in PVC-C according to EN 1566-1.

1.1.1 - MG2-A XL collar used with plastic pipes, made of PVC, in aerated concrete floors					
Sealing system					
The MG2-A XL fire stopping pipe closure device is mounted at the bottom side of the floor (the side that is directly exposed to fire), with PVC pipes penetrating the aerated concrete floor. The floor has a minimum thickness 150 mm and a density of (650 ± 200) kg/m ³					
The penetrating pipe shall be adequately supported at maximum 400 mm and from the non-exposed surface of the floor by appropriate fire resistant through-element support systems.					
The minimum distance between the pipes in normal applications is not less than 100 mm.					
The MG2-A XL fire stopping pipe closure device is put around the penetrating pipe and closed by an axis with 3 hinges and screwed directly into the floors using $\varnothing 6 \times 90$ mm screw.					
Characteristics of the services					
Plastic type	PVC				
Pipe diameter (\varnothing)	See fire resistance class hereafter				
Pipe wall thickness (e)	See fire resistance class hereafter				
Installation specifications					
Pipe arrangement	Single penetration as specified hereafter				
Number of pipes	1 pipe per collar				
Pipe end configuration	Pipe end configurations U/C and C/C				
Pipe insulation	Non-insulated pipes				
Angle of the pipe	Standard (90°)				
Service support construction	Fire resistant support element at maximum 400 mm and from the non-exposed surface of the floor				
Fire resistance class					
MG2-A XL Collar	Pipe diameter [mm]	Pipe thickness [mm]	configuration	Pipe configuration	Fire resistance
200 to 250	200 to 250	4.9 to 11.9	standard	U/C – C/C	EI 120
315 to 400	315 to 400	7.9 to 11.7	standard	U/C – C/C	EI 120

1.1.2 - MG2-A XL collar used with plastic pipes, made of PVC, in aerated concrete wall

Sealing system

The MG2-A XL fire stopping pipe closure device is mounted at both sides of the aerated concrete wall, with PVC pipes penetrating it. The wall has a minimum thickness 100 mm and a density of $(650 \pm 200) \text{ kg/m}^3$

The penetrating pipe shall be adequately supported at between 200 mm and 400 mm at both sides of the aerated concrete wall by appropriate fire resistant through-element support systems.

The minimum distance between the pipes in normal applications is not less than 100 mm.

The MG2-A XL fire stopping pipe closure device is put around the penetrating pipe and closed by an axis with 3 hinges and screwed directly into the wall using M6 x 90 mm screws.

Characteristics of the services

Plastic type	PVC
Pipe diameter (\varnothing)	See fire resistance class hereafter
Pipe wall thickness (e)	See fire resistance class hereafter

Installation specifications

Pipe arrangement	Single penetration as specified hereafter
Number of pipes	1 pipe per collar
Pipe end configuration	Pipe end configurations U/C and C/C
Pipe insulation	Non-insulated pipes
Angle of the pipe	Standard (90°) or Between 60° and 120° as specified hereafter
Service support construction	Fire resistant aerated concrete wall.

Fire resistance class

MG2-A XL Collar	Pipe diameter [mm]	Pipe thickness [mm]	configuration	Pipe configuration	Fire resistance
200 to 250	200 to 250	4.9 to 11.9	standard	U/C – C/C	EI 120
315 to 400	315 to 400	7.9 to 11.7	standard	U/C – C/C	EI 120

ANNEX 1.2: MG2-A XL FIRE STOPPING PIPE CLOSURE DEVICE USED WITH PE-PIPES

This annex reports fire resistance of MG2-A XL fire stopping pipe closure device used with PE pipes penetrating aerated concrete floors and aerated concrete panels. The test results obtained on tubes in HDPE according to EN 15191-1 or EN 12666-1 apply to tubes in PE according to EN 12201-2, EN 1519-1 and EN 12666-1, tubes in ABS according to EN 1455-1 and tubes in SAN+PVC according to EN 1565-1.

1.2.1 - MG2-A XL collar used with plastic pipes, made of PE, in aerated concrete floors					
Sealing system					
<p>The MG2-A XL fire stopping pipe closure device is mounted at the bottom side of the floor (the side that is directly exposed to fire), with PE pipes penetrating the aerated concrete floor. The floor has a minimum thickness 150 mm and a density of (650 ± 200) kg/m³.</p> <p>The penetrating pipe shall be adequately supported at maximum 400 mm and from the non-exposed surface of the floor by appropriate fire resistant through-element support systems.</p> <p>The minimum distance between the pipes in normal applications is not less than 100 mm.</p> <p>The MG2-A XL fire stopping pipe closure device is put around the penetrating pipe and closed by an axis with 3 hinges and screwed directly into the floor using $\varnothing 6 \times 90$ mm screws.</p>					
Characteristics of the services					
Plastic type	HDPE				
Pipe diameter (\varnothing)	See fire resistance class hereafter				
Pipe wall thickness (e)	See fire resistance class hereafter				
Installation specifications					
Pipe arrangement	Single penetration as specified hereafter				
Number of pipes	1 pipe per collar				
Pipe end configuration	Pipe end configurations U/C and C/C				
Pipe insulation	Non-insulated pipes				
Angle of the pipe	Standard (90°)				
Service support construction	Fire resistant support element at maximum 400 mm and from the non-exposed surface of the floor				
Fire resistance class					
MG2-A XL Collar	Pipe diameter [mm]	Pipe thickness [mm]	configuration	Pipe configuration	Fire resistance
200 to 250	200 to 250	7.7 to 22.7	standard	U/C – C/C	EI 120

1.2.2 - MG2-A XL collar used with plastic pipes, made of PE, in aerated concrete wall

Sealing system

The MG2-A XL fire stopping pipe closure device is mounted at both sides of the aerated concrete wall, with PE pipes penetrating it. The wall has a minimum thickness 100 mm and a density of (650 ± 200) kg/m³.

The penetrating pipe shall be adequately supported at between 200 mm and 400 mm at both sides of the aerated concrete wall by appropriate fire resistant through-element support systems.

The minimum distance between the pipes in normal applications is not less than 100 mm.

The MG2-A XL fire stopping pipe closure device is put around the penetrating pipe and closed by an axis with 3 hinges and screwed directly into the wall using M6 x 90 mm screws.

Characteristics of the services

Plastic type	HDPE
Pipe diameter (Ø)	See fire resistance class hereafter
Pipe wall thickness (e)	See fire resistance class hereafter

Installation specifications

Pipe arrangement	Single penetration as specified hereafter
Number of pipes	1 pipe per collar
Pipe end configuration	Pipe end configurations U/C and C/C
Pipe insulation	Non-insulated pipes
Angle of the pipe	90°
Service support construction	Fire resistant support element at 200 mm to 400 mm at both sides of the aerated concrete wall.

Fire resistance class

MG2-A XL Collar	Pipe diameter [mm]	Pipe thickness [mm]	configuration	Pipe configuration	Fire resistance
200 to 250	200 to 250	7.7 to 14.8	standard	U/C – C/C	EI 120
200 to 250	200 to 250	14.8 to 22.7	standard	U/C – C/C	EI 90/ E 120

ANNEX 2: REFERENCE DOCUMENTS

EN 1366-3:2009	Fire resistance tests for service installations – Part 3: Penetration seals
EN 13501-1+A1:2010	Fire classification of construction products and building elements - Part 1: Classification using data from reaction to fire tests
EN 13501-2+A1:2010	Fire classification of construction products and building elements - Part 2: Classification using data from fire resistance tests, excluding ventilation services
EOTA TR 024 amended (July 2009)	Characterisation, Aspects of Durability and Factory Production Control for Reactive Materials, Components and Products
ETAG 026-1 (January 2008)	Fire Stopping and Fire Sealing Products Part 1: General
ETAG 026-2 amended (October 2011)	Fire Stopping and Fire Sealing Products Part 2: Penetration Seals